





- Patented Reinforced Mineral Wool Core Benefits
- Superior low frequency and overall absorption " Class A fire protection (Flame Spread:10, Smoke Developed Rating:95)
- Durable cores that will last in gymnasiums or high-impact environments
- Tensile strength minimum of 2,631 lbs./sq.ft breaking load
- Compressive resistance of 547 psf at 25% compression
- Contribute to LEED® credits
- Made using natural inorganic materials with at least 75% recycled content
- 6-8 lb. density
- Melting point of 2,150°F (ASTM E-136)
- Water repellent - will not mold, rot, or corrode

- The Wedge™ Diffusers** work well in traditional sanctuaries, video conference rooms, cafeterias, and gymnasiums
- Unmatched Class A fire protection as a complete panel assembly
- Slope from 1 3/16" to 3 3/16" across the 4' width of the panel
- Ideal architectural angles that create intelligibility and understanding

EconoWedge™ Diffsorber NRC 1.60

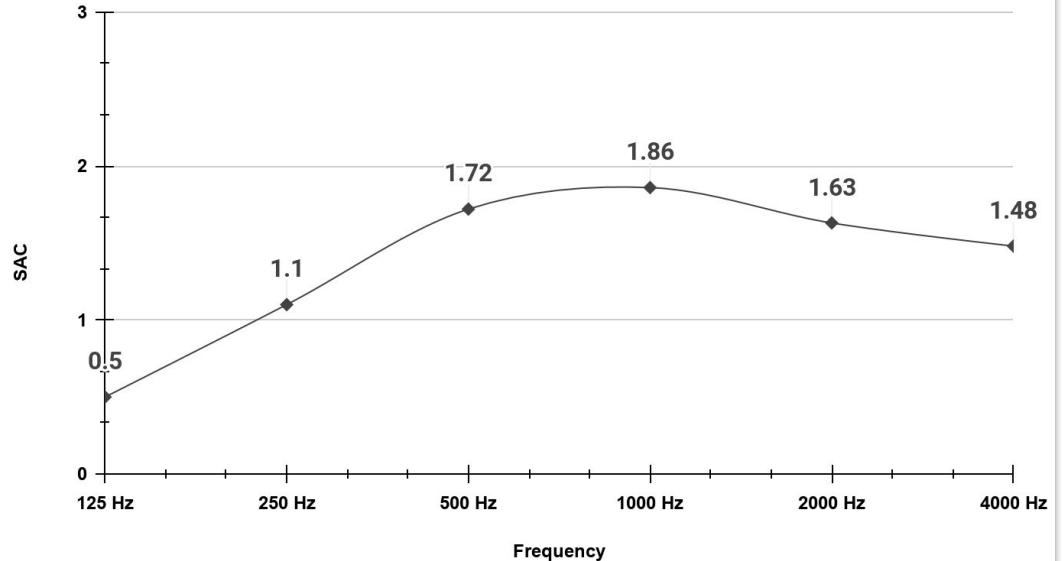

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
.5	1.1	1.72	1.86	1.63	1.48	1.60

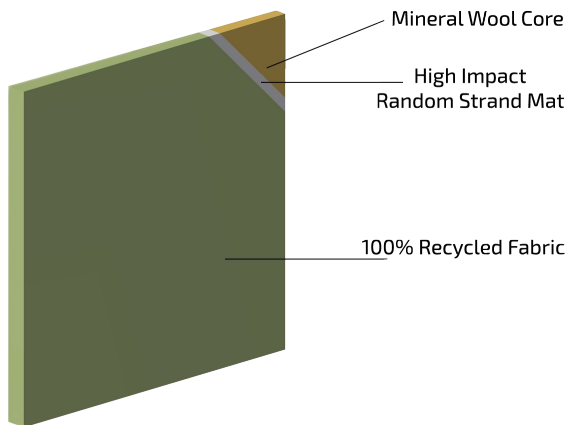

Dimensions	4'x2' to 4'x8'; Custom sizes available
Panel Depth	1 3/16" to 3 3/16" slope
Fabric	Selected from our manufacturer's standard fabric
Core Material	Rockwool
Backing	Fiberglass Mat
Edge Treatment	Regular edge
LEED Eligible	Yes