





- Patented Reinforced Mineral Wool Core Benefits
- Superior low frequency and overall absorption " Class A fire protection ( Flame Spread:10, Smoke Developed Rating:95 )
- Durable cores that will last in gymnasiums or high-impact environments
- Tensile strength minimum of 2,631 lbs./sq.ft breaking load
- Compressive resistance of 547 psf at 25% compression
- Contribute to LEED® credits
- Made using natural inorganic materials with at least 75% recycled content
- 6-8 lb. density
- Melting point of 2,150°F (ASTM E-136)
- Water repellent - will not mold, rot, or corrode

- The Wedge™ Diffusers\*\* work well in traditional sanctuaries, video conference rooms, cafeterias, and gymnasiums
- Unmatched Class A fire protection as a complete panel assembly
- Slope from 1" to 7" across the 2' width of the panel
- Ideal architectural angles that create intelligibility and understanding

MaxWedge™ Diffuser NRC 2.18

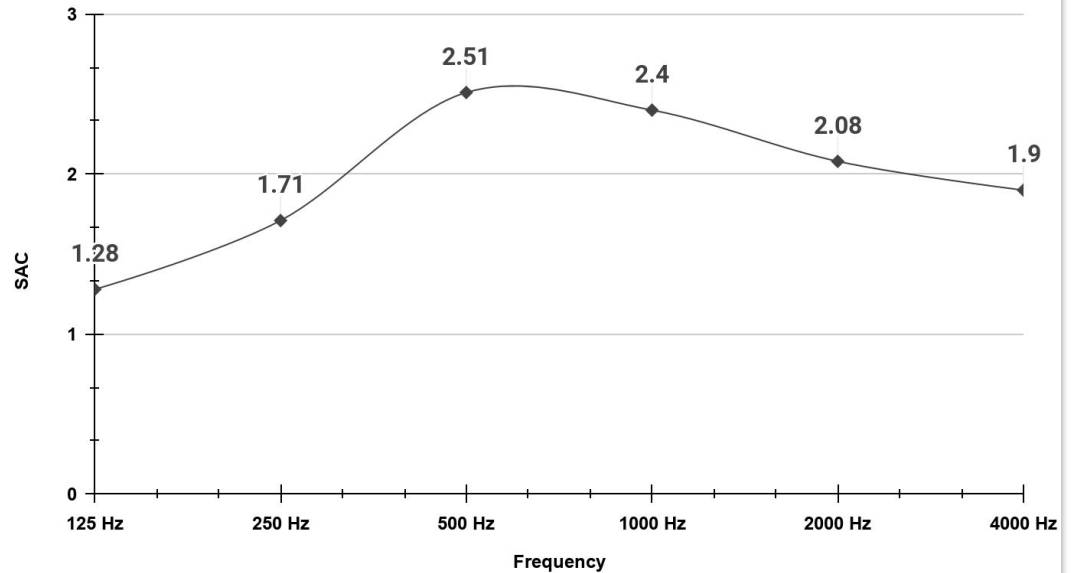

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1.28	1.71	2.51	2.4	2.08	1.9	2.18

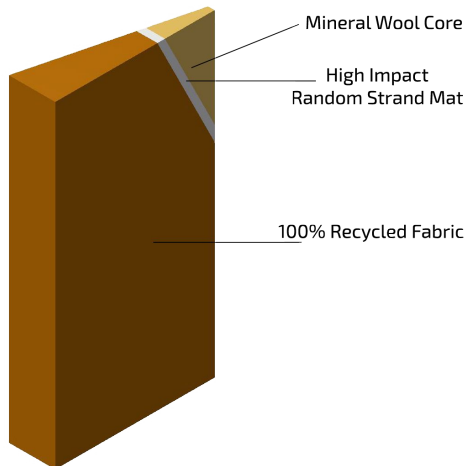

Dimensions	2'x4' to 2'x8'; Custom sizes available
Panel Depth	1" to 7" sloped on 2' width
Fabric	Selected from our manufacturer's standard fabric
Core Material	Rockwool
Backing	Fiberglass Mat
Edge Treatment	Regular edge
LEED Eligible	Yes