





- Patented Reinforced Mineral Wool Core Benefits
- Superior low frequency and overall absorption " Class A fire protection (Flame Spread:10, Smoke Developed Rating:95)
- Durable cores that will last in gymnasiums or high-impact environments
- Tensile strength minimum of 2,631 lbs./sq.ft breaking load
- Compressive resistance of 547 psf at 25% compression
- Contribute to LEED® credits
- Made using natural inorganic materials with at least 75% recycled content
- 6-8 lb. density
- Melting point of 2,150°F (ASTM E-136)
- Water repellent - will not mold, rot, or corrode

- The Wedge™ Diffusers** work well in traditional sanctuaries, video conference rooms, cafeterias, and gymnasiums
- Unmatched Class A fire protection as a complete panel assembly
- Slope from 3 3/16" to 5 3/16" across the 2' width of the panel
- Ideal architectural angles that create intelligibility and understanding

MegaWedge™ Diffuser NRC 1.95

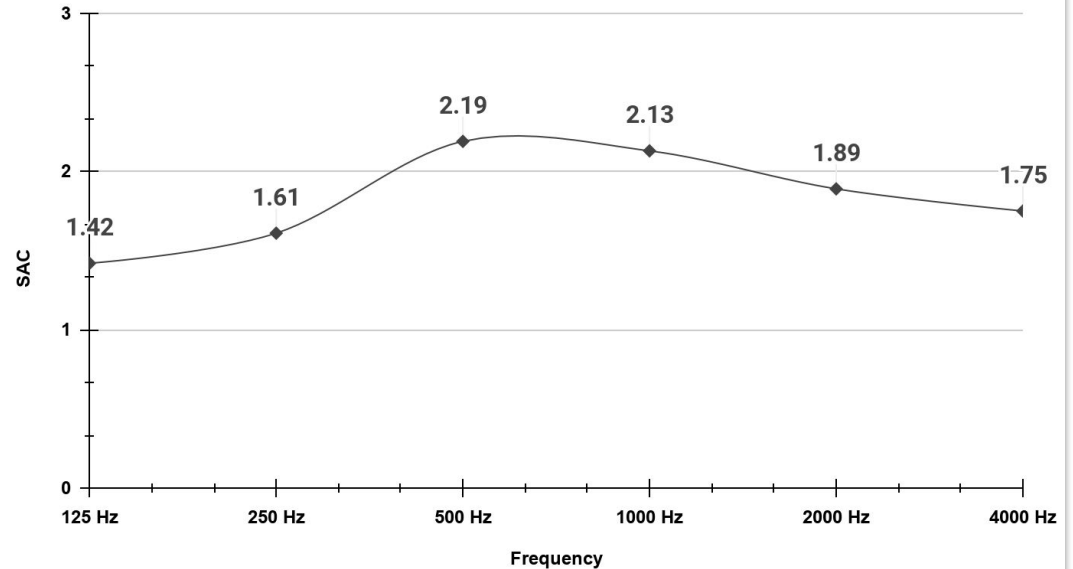

125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
1.42	1.61	2.19	2.13	1.89	1.75	1.95

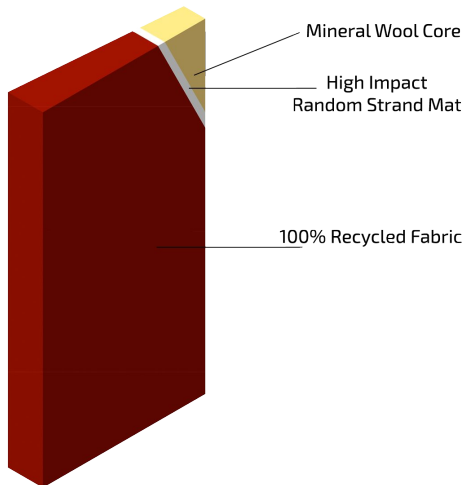

Dimensions	2'x2' to 2'x8'; Custom sizes available
Panel Depth	3 3/16" to 5 3/16" slope on 2' width
Fabric	Selected from our manufacturer's standard fabric
Core Material	Rockwool
Backing	Fiberglass Mat
Edge Treatment	Regular edge,
LEED Eligible	Yes