




- Files should be built to the finished size.
- Resolution should be 100-150 DPI at full size.
- AI/InDesign Files - All fonts should be outlined and links embedded.
- All files should be in CMYK mode.
- Large files can be shared through WeTransfer, Dropbox, or other file sharing service.
- Color Matching:
 - Any PMS color that needs to be matched needs to be included in the file and also called out when you place your order.
 - We can only match colors that are CMYK compatible (no metallic, neon, or other specialty colors).
- Design services are \$75/image when needed.

- Ideal for the walls in offices, conference rooms, and classrooms, the Flat Panel can also be used to add absorption to a ceiling surface.
- Unmatched Class A fire protection as a complete panel assembly.
- Regular or PVC-hardened edge finish.
- Perfect product to help negate echo.

2" Flat Panel NRC 1.40

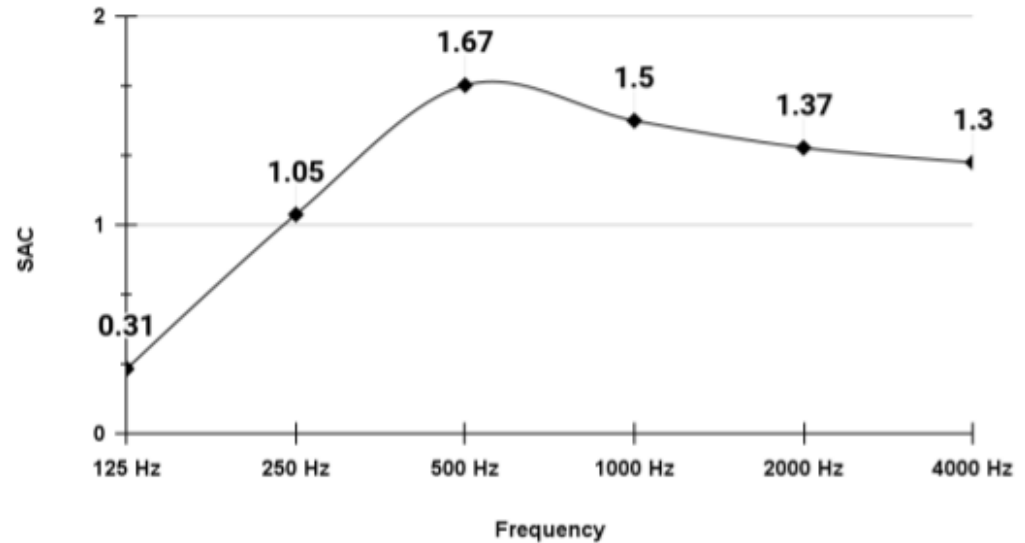

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
2"	.31	1.05	1.67	1.50	1.37	1.30	1.40

Dimensions	2'x2' to 4'x8'; Custom sizes available
Panel Depth	2"
Fabric	Selected from our manuf. Standard fabric
Core Material	Rockwool
Backing	Fiberglass Mat
Edge Treatment	Regular edge, PVC Hardened Edge
LEED Eligible	Yes